

1 / 8



FIG. 3

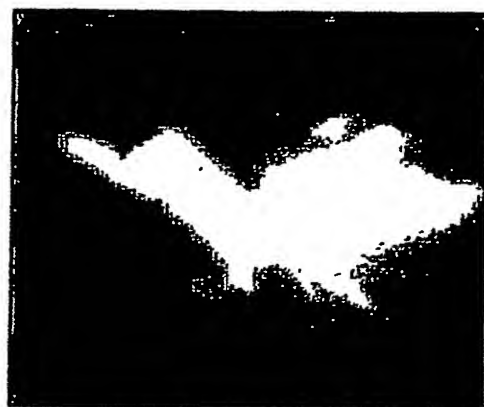


FIG. 2



FIG. 4



FIG. 1

2/8



FIG. 6

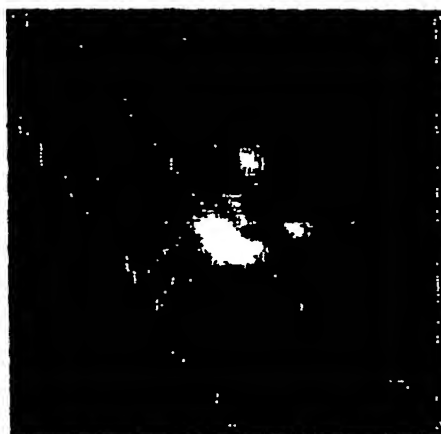


FIG. 7

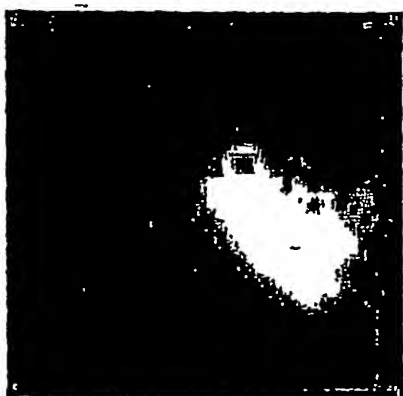


FIG. 5

3 / 8

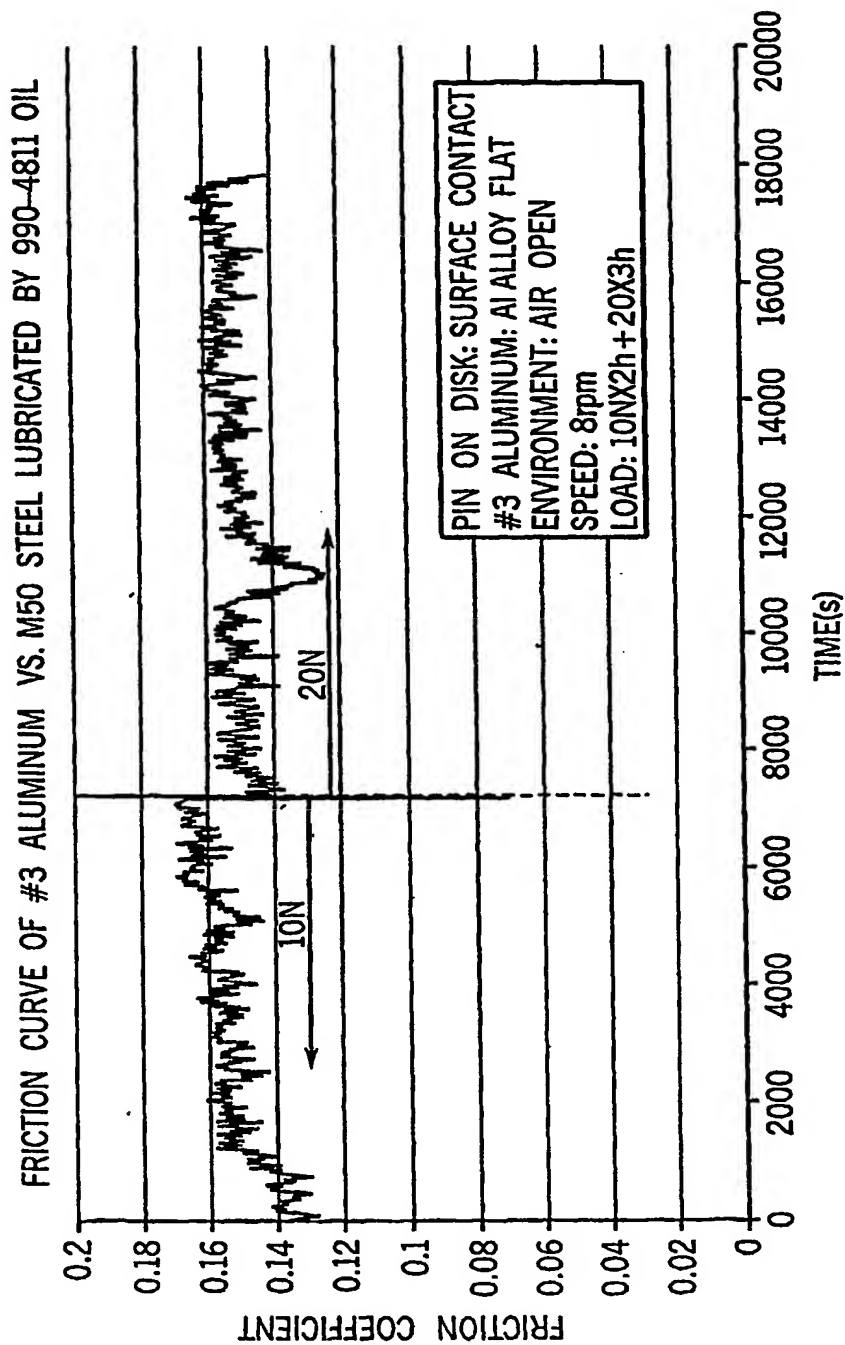


FIG. 8

4 / 8



FIG. 9a

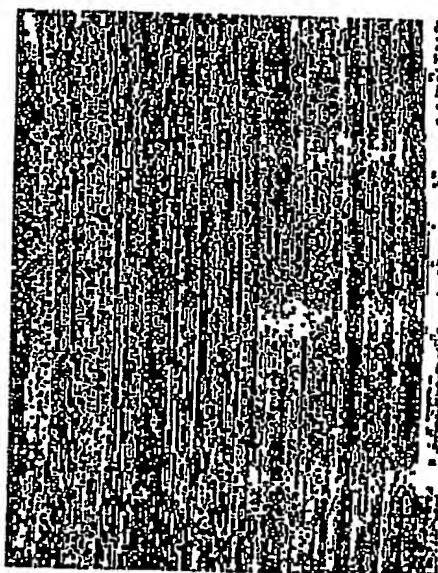


FIG. 9b

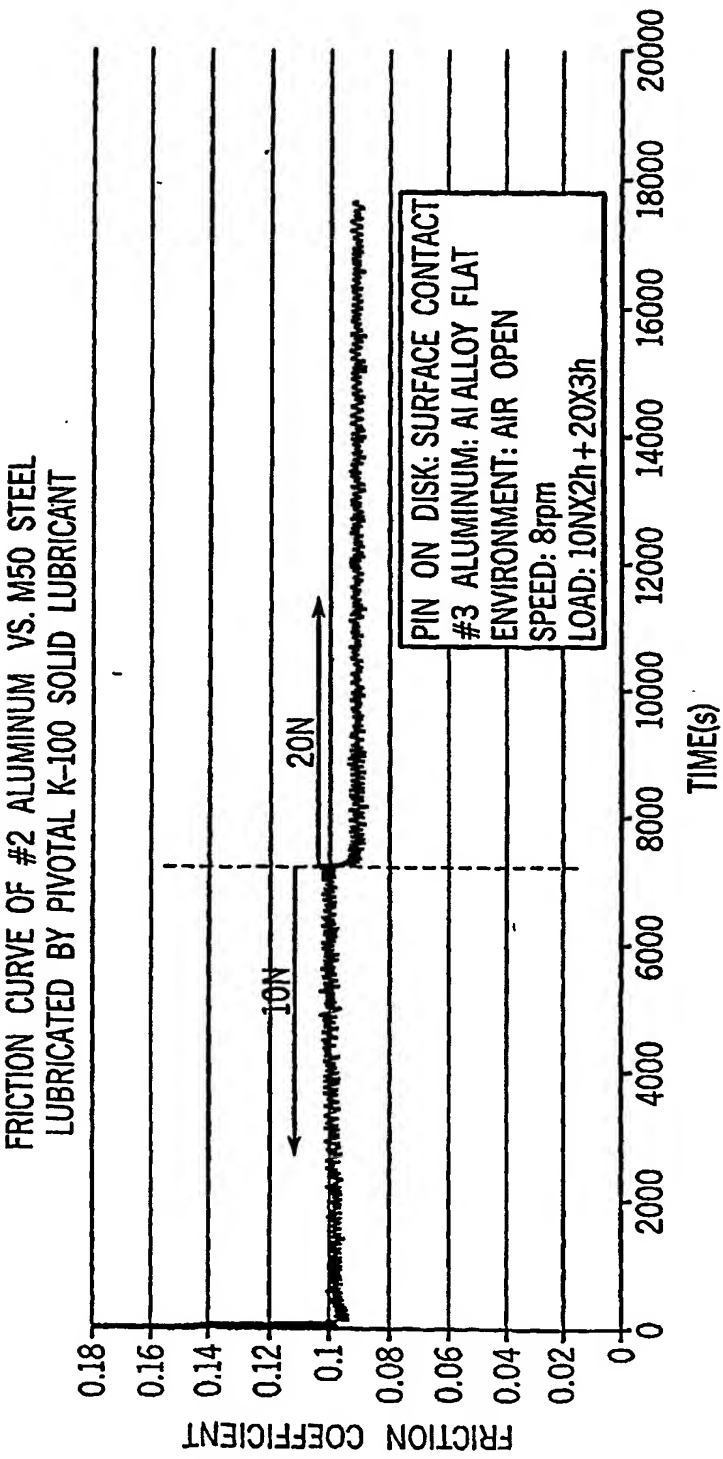


FIG. 10

6 / 8



FIG. 11

7 / 8

C30904-1 vs H13 PIN  
OPEN AIR' 45% R.H. 20 N load, 7.7 rpm, 22 mm track diameter

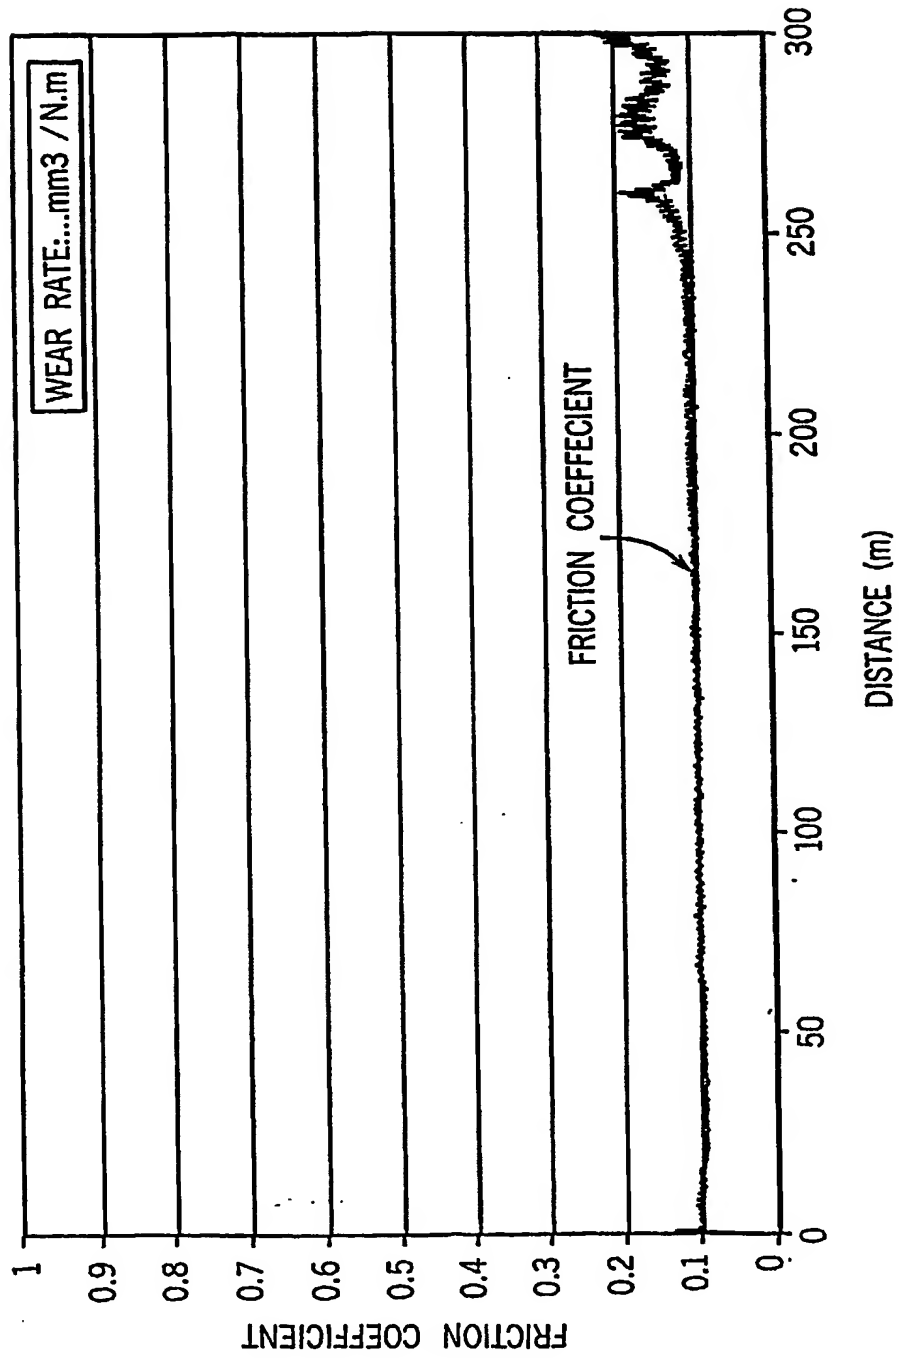


FIG. 12a

8 / 8

C30905-2 vs H13 PIN  
OPEN AIR 44% R.H. 20 N load, 7.7 rpm, 22 mm track diameter

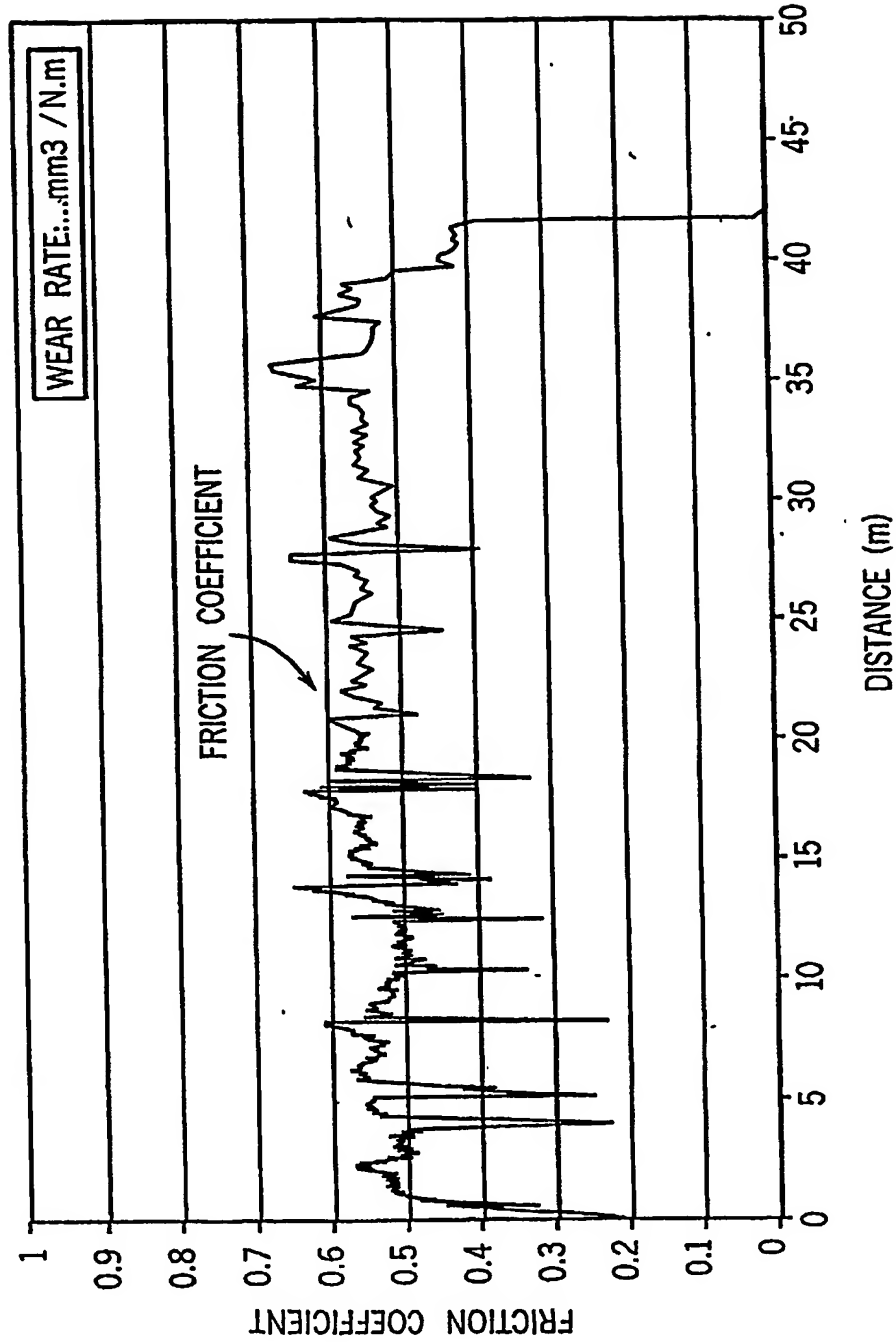


FIG. 12b